




ZC110
ZC110 Millimeter-Wave Converters

Part-No.: 1323.7617.02

Product Description

Key Features:

- variable output power
- wide dynamic range
- wide frequency range
- highly stable measurement
- convenient handling

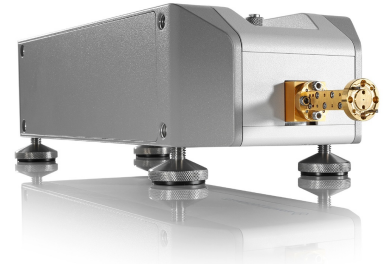

Technical Specifications	
Test Port	
Frequency Range [GHz]	75 to 110
Port Type	WR-2540 (UG387/U flange compatible)
Output Power [dBm (typ.)]	> +12 dBm (n. trc.), typ. +14 dBm
Output Power Attenuation [dB]	n. A.
Input Power Damage Level [dBm]	+20
Stability (Magnitude [dB] / Phase [°] (typ.))	typ. < 0.2 dB and typ. < 2°
Source Input (RF IN)	
Frequency Range [GHz]	12.5 to 18.33
Port Type	2.92 mm, female
Input Power Range [dBm]	-15 to +10
Local Oscillator Input (LO IN)	
Frequency Range [GHz]	9.37 to 13.75
Port Type	SMA, female
Input Power Range [dBm]	+5 to +10
Measurement Output (MEAS OUT)	
Frequency Range [MHz]	5 to 2000
Port Type	SMA, female
Reference Output (REF OUT)	
Frequency Range [MHz]	5 to 2000
Port Type	SMA, female
System Characteristics	
Source match (without system error correction)	> 17 dB (n.trc.) ¹
Directivity (without system error correction)	> 21 dB (n.trc.) ¹
Dynamic Range [dB]	> 110, typ. 120

Dynamic range is defined as the difference between the data trace of the transmission magnitude with maximum test port output power and both test ports through-connected on the one hand and the RMS value of the data trace of the transmission magnitude produced by noise and crosstalk with test ports short-circuited on the other. The specification is valid without system error correction and at 10Hz measurement bandwidth. The dynamic range can be increased by using a measurement bandwidth of 1Hz.

¹ Without consideration of measurement uncertainty.