




WTA 90-140
Waveguide Tunable Attenuator 90-140 GHz

Part-No.: 04700054

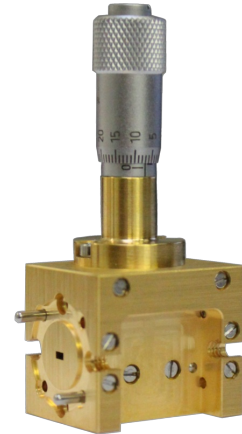

Technical Specifications

Frequency Range [GHz]	90 - 140
RF Port	WR8 (UG387/UM)
Attenuation Range [dB]	0 – 40
Max. Input Power [dBm]	+20
Insertion loss [typ. dB]	0.4
Tuning	Micrometer



Typical Performance

WTA 90-140

