




SHM 140-220
Subharmonic Mixer 140-220 GHz
Part-No.: 02000019

Product Description

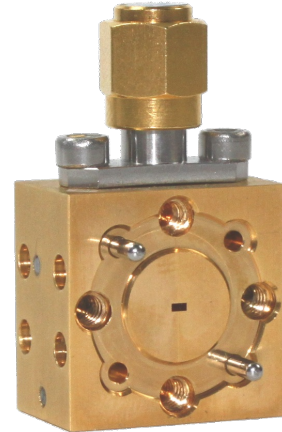

Technical Specifications

RF Frequency [GHz]	140 - 220
RF Port	WR5.1 (UG387/UM)
LO Frequency [GHz]	70 - 110
LO Port	WR10 (UG387/UM)
LO Power	typ. +10
IF Frequency	DC - 18 GHz
IF Port	2.92 mm male
Conversion Loss (DSB)	typ. -10 dB

Typical Performance

SHM-220 Conversion Loss

